

TECHNICAL DATA SHEET

HM-6


Combined protection

Article NO: D1102

Material: ABS (thermoplastic,

acrylonitrile-butadiene-styrene)

Colour: white, hi-viz yellow, orange, red,

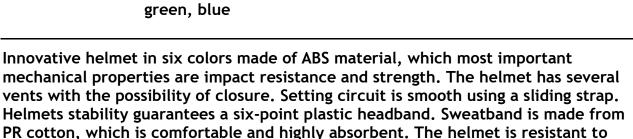

This personal protective equipment is in conformity with these harmonized European Standards:

EN 397:2012+A1:2012: Industrial safety helmets.

Certified by notified body no. 2797 (BSI Group The Netherlands B.V., John M. Keynesplein 9, 1066 EP Amsterdam, The Netherlands), Certificate no CE 692748, dated 12th September 2019.

Pieces in carton: 20
Polybag packing (pieces): 1
Carton weight: 10 kg
Carton size: 0,142 m³

heat from -30 $^{\circ}$ C to + 50 $^{\circ}$ C.

To provide protection this helmet must be adjusted to the size of the user's head. To alter the fit, adjust the wheel ratchet at the back of the helmet. The outer shell of the helmet is to be cleaned with warm water using a small amount of detergent. Direct contact with liquids containing organic solvents or alcohol may reduce the mechanical strength of the shell and therefore such contact must be avoided. Six-point webbing harnesses are to be cleaned with a lukewarm weak solution of water and detergent, rinsed well and left to dry. The sweatband is to be cleaned with a disinfecting and cleaning agent, if heavily soiled we recommend replacing the sweatband. For long term storage as well as transportation we recommend using the original container of the helmet. Before each use of the helmet, it is necessary to inspect it thoroughly to establish whether it is cracked, cut or damaged in a different way.