



TECHNICAL SHEET

FA 50 208 11

Designation: Aluminium scaffold hook

Material: Aluminium alloy


Opening: 110 mm

Minimum breaking strength: 20 kN


Compliance: EN362 : 2004 Class T



OPEN CONDITION

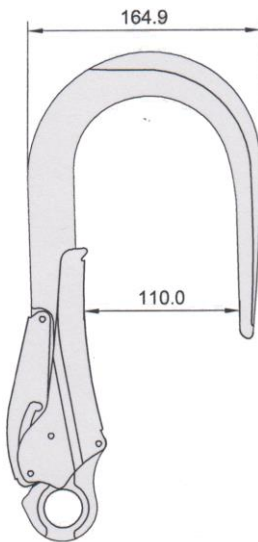

CLOSED CONDITION

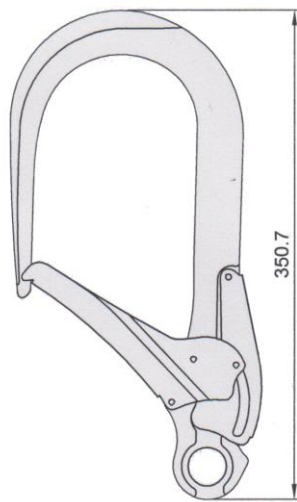

HS code

76161000

Carton size / Pieces

40 x 30 x 19 / 100

Unit weight

0.900 Kg

AET : N° Issue Extension

Satra Technology Centre, N°0321
Wyndham Way, Telford Way, Kettering,
Northamptonshire, NN16 8SD, United Kingdom.

Article 11: GB07/73551

SGS United Kingdom Ltd., N° 0120
Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom



MAJ : 01/15

ZI les portes du Dauphiné

4 rue de l'Aigüe

69 780 St Pierre de Chandieu – France

Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32

www.kratossafety.com info@kratossafety.com

