

**ARDON®**

# TECHNICAL DATA SHEET

## BUNDY

### ROUGH HANDLING IN DRY ENVIROMENT

**GERENAL DATA:****Code:** A1096**Material:**

Palm buffalograinleather (white)  
 Back buffalograin leather (white)  
 Cuff tightened  
 Liner none  
 Thickness  $\pm 0,70\text{mm} - 0.90\text{ mm}$  (in palm)

**Description:** full leather gloves made of buffalo grainleather**Size(s):** 9"/L - 12"/ 3XL**Unit:** pair**Packing:**

Units in carton 120  
 Units in polybag 12  
 Retail packing sizes 10 & 11 availablealsowithheadercard

**Dimmensions:**

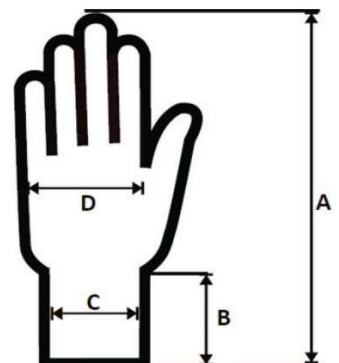
	9	10	11	12
carton HxWxD (cm)	58,4x24x24	61x25,4x25,4	63,5x26,7x26,7	66x28x28
carton (cbm)	0,034	0,040	0,046	0,052

**Weight:**

	9	10	11	12
carton (kg)	12,41	12,84	13,00	15,92
unit (g)	95,00	98,00	100,00	124,00

**Size chart (cm)**

	9	10	11	12
totallength (A)	24,5	25,5	26,5	27,5
cufflength (B)	5,5	6,0	6,5	6,5
cuffwidth (C)	10,0	11,0	12,0	13,0
palmwidth (D)	12,0	1205	13,0	13,5

*tolerance  $\pm 0,50$  (cm)*

ARDON SAFETY s. r. o.  
 Tržní 2902/14, Přerov I - Město  
 Tel.: 581 250 061 www.ardon.cz

**STANDARDS:**

(EU) 2016/425

EN ISO 21420:2020

EN 388:2016 + A1:2018

Protective gloves – general requirements and test methods

Protective gloves against mechanical risks

Protection levels:

EN 388



MECHANICAL RISKS	LVL	score	unit
abrasion resistance:	2	500 – 2.000	cycles
cut resistance:	1	1,2 – 2,5	index
tearing resistance:	2	25 – 50	N
puncture resistance:	1	20 – 60	N
cut resistance acc. to ISO:	X	not measured	N

**SPECIAL FEATURES:**

- leather of high and stable quality, every order submits to quality control and skin safety tests before loading (among others pH level and hexavalent chromium content are measured)
- full leather gloves with good mechanical abrasion resistance
- fine, soft and pliable leather
- they are easy to dress and firmly fixed to the hand thanks to the tightened cuff
- each pair in each size is retail ready packed

<b>EAN</b>	<b>9</b>	<b>8592390170897</b>
	10	8592390170903
	11	8592390170934
	12	8592390170927
	10 with header	8592390170941
	11 with header	8592390170958