



TECHNICAL SHEET



FA 20 302 02

Designation :

Retractable Fall Arrester in webbing

- Webbing width : 50 mm
- Minimum breaking strength : > 15 kN
- Fall indicator at the top of the device
- Protective casing
- Energy Absorber width 45 mm

Connector :


1 snap hook, opening 17 mm, ref. FA5020217

Compliance – Conforms to EN 360:2002 that can be used in **fall factor 2 (maxi 1.80 m)**

Length : 2,50 m

Materials of the components :

Casing : Polyethylene anti shock
 Webbing : Polyamide / Polyester
 Connector : Steel

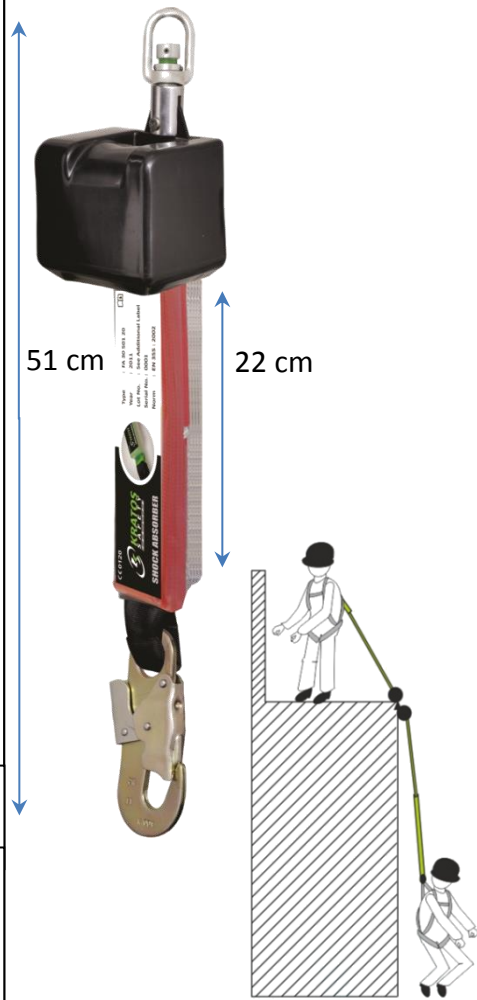

HS code	Carton Size / Pieces	Unit Weight
84289090	71x33x21 / 20	1,3 kg

AET: N° 2194 Issue 5 Extension 3
 Satra Technology Centre, N°0321
 Wyndham Way, Telford Way, Kettering,
 Northamptonshire, NN16 8SD, United Kingdom.

Article 11: GB07/73551
 SGS United Kingdom Ltd., N° 0120
 Unit 202B, Worle Parkway,
 Weston-super-Mare, BS22 6WA, United Kingdom



ZI les portes du Dauphiné
4 rue de l'Aigue
69 780 St Pierre de Chandieu – France
 Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32
 www.kratossafety.com info@kratossafety.com

