



# TECHNICAL SHEET

FA 60 006 20

**Designation:**

Anchorage steel wire rope sling with protective sleeve and 2 protected loops

Recommendation: Designed for structures with sharp edges.


Material: Wire rope: galvanized steel.  
Protective steel: PVC.

Length: 2 m

Diameter: 8 mm

Minimum breaking strength: > 15 kN

Compliance: EN795 : 2012 Type B.

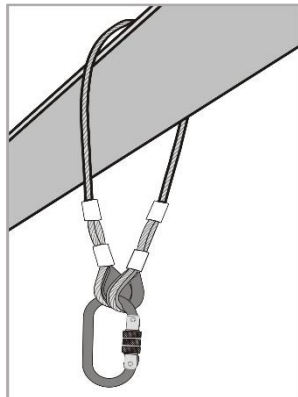

**HS code**

56090090

**Carton size / Pieces**

40x40x24 / 25

**Unit weight**

0.74 kg

**AET : N°5557 Issue 3 Extension 2**

Satra Technology Centre, N°0321  
Wyndham Way, Telford Way, Kettering,  
Northamptonshire, NN16 8SD, United Kingdom.

**Article 11: GB07/73551**

SGS United Kingdom Ltd., N° 0120  
Unit 202B, Worle Parkway,  
Weston-super-Mare, BS22 6WA, United Kingdom



MAJ : 07/14

**ZI les portes du Dauphiné**

**4 rue de l'Aigue**

**69 780 St Pierre de Chandieu – France**

**Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32**

**www.kratossafety.com info@kratossafety.com**

